



120-347V
Multi-Volt

1x4 LED Flat Panel Light

Don't worry its Multi-volt!



FEATURES

1x4' ft 40W 4000lm
100lm/W Lumens Efficacy
DLC 4.2, cUL listed

- Dimmable (0-10V)
- L70 minimum 50,000 hour life
- Replaces 4 x F32T8 Fixture
- No ballast required
- Acrylic PMMA light guide plate
- Aluminum housing AL6063-T6
- Suitable for damp locations
- No flicker, mercury free, instant on
- 5-year warranty

APPLICATION

- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom

INSTALLATION


- Recessed
- Suspending
- Wall/Ceiling mount

ADDITIONAL INFO


- White Trim
- Operating Temperature -20°C ~+50°C

PHOTOMETRIC



Lux Distance Curve



Light Distribution Curve [Unit:cd]



DIAGRAM

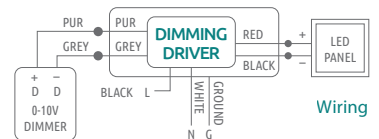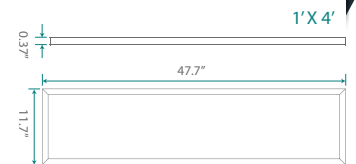

ORDER CODE	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	CRI	IP	PF	MOL (IN)	CASE QTY.
L2811-2342	LED FLAT PANEL 1x4' MULTI-VOLT 40W 4000K WH	40	120-347V	4000	4000K	50,000	180°	80+	20	0.9	L47.7xW11.7xH1.8	2
L2811-2542	LED FLAT PANEL 1x4' MULTI-VOLT 40W 5000K WH	40	120-347V	4000	5000K	50,000	180°	80+	20	0.9	L47.7xW11.7xH1.8	2
Optional Accessories												
L2850-0003	LFP SUSPENSION CABLES/ KITx3											
L2851-0002	LFP1'x4' SURFACE MOUNT FRAME											

Distributed by



Toronto | Calgary | Halifax

Tel: 1-905-264-1125 Toll Free: 1-800-361-7820 Fax: 1-905-264-1175
Email: information@interadwes.com | Website: www.interadwes.com
Head Office: 1-180 New Huntington Road, Vaughan, ON L4H 0P5