



Simply Brilliant



Product information

FEATURES

- 100w 13000LM, 150w 17200LM, 240w 28700LM
- High Lumen Efficacy
- DLC Premium, cUL listed
- 1-10v dimmable
- LM-79 & LM-80 tested
- 50,000 hour life
- 150°x85° (TYPE III) Lens
- Aluminum alloy housing
- Suitable for wet locations
- Rated for IP65
- Quick & easy installation
- No flicker, mercury free, instant on
- 5-year warranty

APPLICATION

- Parking lots
- Airports
- Building facades
- Streetscapes
- Entryways



INSTALLATION

- Pole Mount
- Yoke/Flood (Optional)

ADDITIONAL INFO

- Bronze Finish
- Op. Temp. -40°C ~+45°C
- Optional: Photocell/ Surge Protector

DIAGRAM

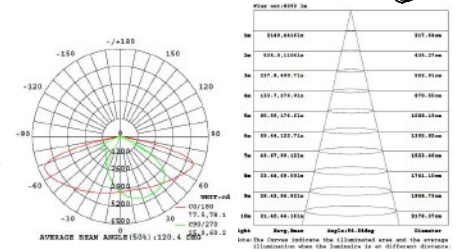

ORDER CODE	DLC ID	DESCRIPTION	WATTS	VOLT	LUMENS	CCT (K)	LIFE HRS	CRI	IP	PF	MOL (IN)	CASE QTY.
L6411-2230	PLGYHXT24RD6	AREA PARKING LIGHT 150W 17200LM 120V POLE MOUNT	100W	100-277V	13000	4000K	50,000	70+	65	0.9	23.8x14.56x6.7	1
L6411-2330	PLOYSARRNPG5	AREA PARKING LIGHT 150W 17200LM 120V POLE MOUNT	150W	100-277V	17200	4000K	50,000	70+	65	0.9	23.8x14.56x6.7	1
L6411-2350	PLSQ99DZJUCQ	AREA PARKING LIGHT 150W 17200LM 120V POLE MOUNT	150W	100-277V	17200	5000K	50,000	70+	65	0.9	23.8x14.56x6.7	1
L6411-2530	PLW8Q681W7JO	AREA PARKING LIGHT 240W 28700LM 120V POLE MOUNT	240W	100-277V	28700	4000K	50,000	70+	65	0.9	32.28x15.35x7.28	1
L6411-2550	PLTC7AK3Z1Y7	AREA PARKING LIGHT 240W 28700LM 120V POLE MOUNT	240W	100-277V	28700	5000K	50,000	70+	65	0.9	32.28x15.35x7.28	1
L6411-5330	PLYNUJTDC9TX	AREA PARKING LIGHT 150W 17200LM 347V POLE MOUNT	150W	200-480V	17200	4000K	50,000	70+	65	0.9	23.8x14.56x6.7	1
L6411-5350	PLMGELFX8N9E	AREA PARKING LIGHT 150W 17200LM 347V POLE MOUNT	150W	200-480V	17200	5000K	50,000	70+	65	0.9	23.8x14.56x6.7	1
L6411-5530	PL5AJY83YR8E	AREA PARKING LIGHT 240W 28700LM 347V POLE MOUNT	240W	200-480V	28700	4000K	50,000	70+	65	0.9	32.28x15.35x7.28	1
L6411-5550	PLN9VWNPS3ZG	AREA PARKING LIGHT 240W 28700LM 347V POLE MOUNT	240W	200-480V	28700	5000K	50,000	70+	65	0.9	32.28x15.35x7.28	1

AVAILABLE ACCESSORIES: YOKE MOUNT L6419-1100 (FOR 100W,150W & 240W). FLOOD MOUNT L6419-2100 (FOR 100W,150W) L6419-2200 (FOR 240W).