



Simply Brilliant



Dimmable



High CRI



LISTED



## Product information

### FEATURES

- 110/160/220w, 15400/22400/30800LM
- DLC 5.1 Premium Listed
- High Lumen Efficacy 140Lm/W
- Pre-installed sensor receptacle
- Quick connect to plug & play motion sensor
- 0-10v Dimmable
- UGR<28 polycarbonate diffuser lens
- Slim design
- 50,000 hour life
- Multi-volt AC120-277/347V
- Steel housing with white coating
- Quick & easy installation
- No flicker, mercury free, instant on
- 5-year warranty

### APPLICATION

- Gymnasium
- Warehouse
- Museum
- Recreation Center


### INSTALLATION

- Pendant
- Suspension
- Mounting: 3ft chains & hooks

### ADDITIONAL INFO

- White Finish
- Operating Temperature -40°C ~+45°C
- Suitable for dry and damp location
- Optional: Microwave Sensor (L5638-2300)

### DIAGRAM

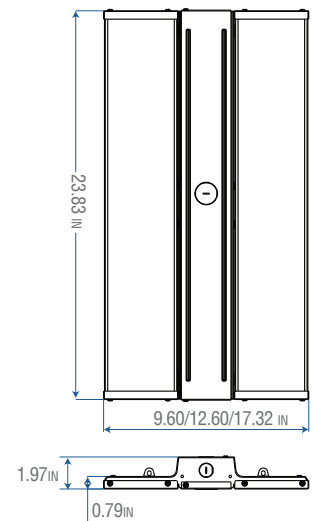

ORDER CODE	MODEL	DLC ID	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	BEAM ANGLE	IP	PF	MOL (IN)	CASE QTY.
L5633-2230-BX2	ILX-LH-AS2-2FT110WMV-40K	P3JS80RS	LINEAR HIGH BAY 110W M-V 4K	110	120-347V	15400	4000K	105°	20	0.90	9.60x23.83x1.97	2
L5633-2250-BX2	ILX-LH-AS2-2FT110WMV-50K	POW3RWTJ	LINEAR HIGH BAY 110W M-V 5K	110	120-347V	15400	5000K	105°	20	0.90	9.60x23.83x1.97	2
L5633-2330-BX2	ILX-LH-AS2-2FT160WMV-40K	PJUOKVC4	LINEAR HIGH BAY 160W M-V 4K	160	120-347V	22400	4000K	105°	20	0.90	12.60x23.83x1.97	2
L5633-2350-BX2	ILX-LH-AS2-2FT160WMV-50K	PB7ZU4YA	LINEAR HIGH BAY 160W M-V 5K	160	120-347V	22400	5000K	105°	20	0.90	12.60x23.83x1.97	2
L5633-2430-BX2	ILX-LH-AS2-2FT220WMV-40K	PET19YHJ	LINEAR HIGH BAY 220W M-V 4K	220	120-347V	30800	4000K	105°	20	0.90	17.32x23.83x1.97	2
L5633-2450-BX2	ILX-LH-AS2-2FT220WMV-50K	PQZKBFUX	LINEAR HIGH BAY 220W M-V 5K	220	120-347V	30800	5000K	105°	20	0.90	17.32x23.83x1.97	2