



Simply Brilliant



NSF/ANSI 2



VANDAL PROOF



NEMA 4X



Intertek



Product information

FEATURES

- 4FT 46/38/30w wattage selectable
- 6440/5320/4200 lumens 140LM/w
- DLC Premium, cETL listed
- NSF/ANSI - food equipment certified
- NEMA 4X certified
- IK10 vandal-proof housing for deployment in harsh environments
- IP66 Water-resistant, dust-tight
- 0-10v dimmable
- Internal color selector switch to 3500K/4000K/5000K
- 50,000 hour life
- PC housing and Anti-glare diffuse lens
- Quick & easy installation and maintenance
- No tools required to open/close the fixture
- 5-year warranty

APPLICATION

- Parking Garage
- Stairwells
- Walkways
- Canopies
- Commercial/Industrial


INSTALLATION

- Surface mount
- Pendant (optional)
- Suspended (optional)

ADDITIONAL INFO

- Light gray housing
- Operating temperature -20°C ~+50°C
- Microwave sensor L2502-9100 (optional)
- Wireless remote L5330-8400 (optional)
- Emergency battery back up (optional)

DIAGRAM

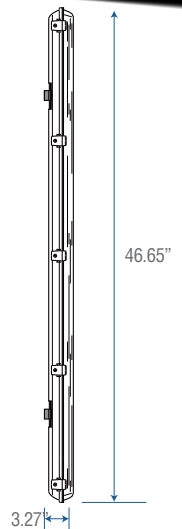

ORDER CODE	MODEL NO.	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	CRI	MOL (IN)	CASE QTY.
L2502-3210	ILX-SS2-446WSMV3CCT2	4' 46/40/35/30WS VAPOUR TIGHT FIXTURE 3CCT DIM WH	46		6440	3500K			
			38	120-347V	5320	4000K	80+	46.65 x 4.17 x 3.27	6
		DLC ID: S-MPQJHZ: Premium: Low-Bay Luminaires for Commercial and Industrial Buildings	30		4200	5000K			
		S-N9Y807: Premium: Stairwell and Passageway Luminaires							

MODEL EXAMPLE ILX-SS2-446WSMV3CCT2

ILX	VS2	4	46WS	MV	3CCT2
Brand	Series	Size	Wattage Selectable	Voltage	CCT
illuminex	Supra Series II	2=2FT 4=4FT 8=8FT	46W 40W 35W 30W	MV=120-347V Blank=120-277V	3 Co-related Color Temperature Blank=Single Color Temperature

ILLUMINEX TECHNOLOGIES INC.

Tel: 1-905-264-6670 Toll Free: 1-844-985-1590 Fax: 1-905-264-6671

Email: csr@illuminexled.com | Website: www.illuminexled.com

Head Office: 1-1 Keyes Court, Vaughan, ON L4H 4V6