



Simply Brilliant



Dimmable



High CRI



## Product information

### FEATURES

- 165W, 225W Wattage and CCT Selectable
- ETL, DLC 5.1 Premium
- High Lumen Efficacy 150Lm/W
- Pre-installed sensor receptacle
- Quick connect to plug & play motion sensor
- 0-10v Dimmable
- UGR<28 polycarbonate diffuser lens
- Slim design
- 50,000 hour life
- Multi-volt AC120-277/347V
- Steel housing with white coating
- Quick & easy installation
- No flicker, mercury free, instant on
- 5-year warranty

### APPLICATION

- Gymnasium
- Warehouse
- Museum
- Recreation Center


### INSTALLATION

- Pendant
- Suspension
- Mounting: 3ft chains & hooks

### ADDITIONAL INFO

- White Finish
- Operating Temperature -40°C ~+45°C
- Suitable for dry and damp location
- Optional: Microwave Sensor (L5638-2300) Remote (L5638-3300) 10FT Cord (L5638-5200)

### DIAGRAM

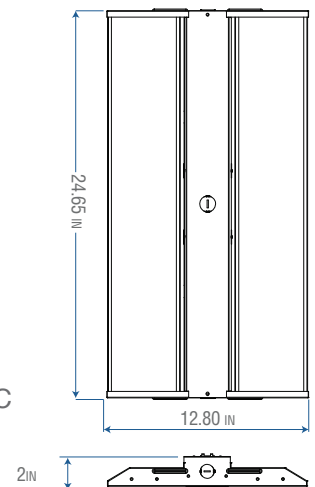

ORDER CODE	MODEL	DLC ID	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	BEAM ANGLE	IP	PF	MOL (IN)	CASE QTY.
L5635-0165-BX2	ILX-LH-AS4-2FT165WMV-WSC	S-M1135G	LINEAR HIGH BAY 165WS 3CCT MV	90W	120-347V	13500	3500K	105°	20	0.90	12.80x24.65x2	2
				120W	120-347V	18000	4000K	105°	20	0.90	12.80x24.65x2	2
				165W	120-347V	24750	5000K	105°	20	0.90	12.80x24.65x2	2
L5635-0225-BX2	ILX-LH-AS4-2FT225WMV-WSC	S-GGM3SN	LINEAR HIGH BAY 225WS 3CCT MV	120W	120-347V	18000	3500K	105°	20	0.90	12.80x24.65x2	2
				165W	120-347V	24750	4000K	105°	20	0.90	12.80x24.65x2	2
				225W	120-347V	33750	5000K	105°	20	0.90	12.80x24.65x2	2