



5CCT

The freedom of Color Changing Temperature (CCT)!

Selectable Color Temperatures of 2700K/3000K/3500K/4000K/5000K



Wet Location



Fire Rated
FT6 Cable



High CRI



Dimmable



Intertek



ENERGY STAR

Product information

FEATURES

- 4" 12W 1200lm
- Selectable color temperatures of 27000K/3000K/3500K/4000K/5000K
- Fire rated 2H FT6 cable
- Suitable for wet locations
- Energy Star, cETLus listed
- Type IC rated (direct contact with insulation)
- Less than 0.1% defective rate
- Triac Dimmable
- COB Type LED
- 50,000 hour life
- Quick & easy installation
- No flicker, mercury free, instant on
- 5-year warranty

APPLICATION

- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom


INSTALLATION

- Recessed
- Insulated/drop ceilings
- Fits under studs and in narrow plenums

ADDITIONAL INFO

- White Finish
- Operating Temperature -10°C ~+40°C

DIAGRAM

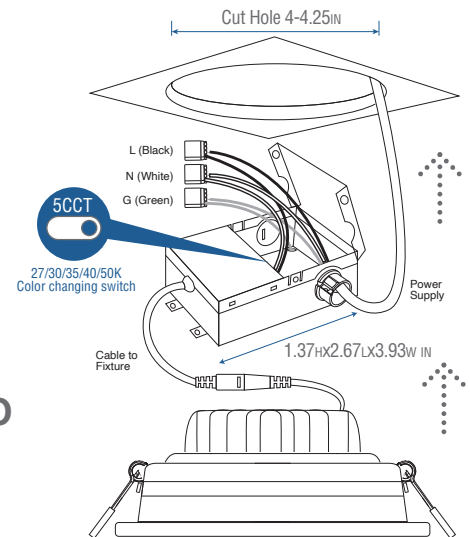

ORDER CODE	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	IP	CRI	PF	CASE QTY.
L3424-0010	BAFFLE GIMBAL 4"R 12W 5CCT COLOR TUNEABLE WHITE	12	120 V	1200	2700K 3000K 3500K 4000K 5000K	50,000	36°	54	95+	0.98	40
L3424-0020	BAFFLE GIMBAL 4"R 12W 5CCT COLOR TUNEABLE BLACK										

ES ID: TBA MODEL: ILX-DG44-12W-5CCT-WF