



Simply Brilliant



### Product information

#### FEATURES

- Power (wattage) & Color (CCT) selectable
- 130LM/w High Lumen Efficacy
- DLC Premium, cUL listed
- 1-10v dimmable
- 120-347V 50/60Hz
- 12V Auxiliary output
- 50,000 hour life
- Beam (TYPE III) (Type III, IV, V lens interchangeable)
- Aluminum alloy housing with Flip Cover
- Surge protection 6KV line to ground/Line  
(lighting arrester 10KV available)
- Rated for IP66
- Anti-UV PC lens with >95% light transmission
- 5-year warranty

#### APPLICATION

- Parking lots
- Airports
- Building facades
- Streetscapes
- Entryways


#### INSTALLATION

- Universal Mount
- Yoke/Flood/etc (Optional)

#### ADDITIONAL INFO

- Bronze Finish
- Op. Temp. -40°C ~+45°C
- Optional:  
Microwave Sensor  
PIR Sensor  
Photocell AC120-277V  
Receptacle + Shorting Cap  
+ Photocell

#### DIAGRAM

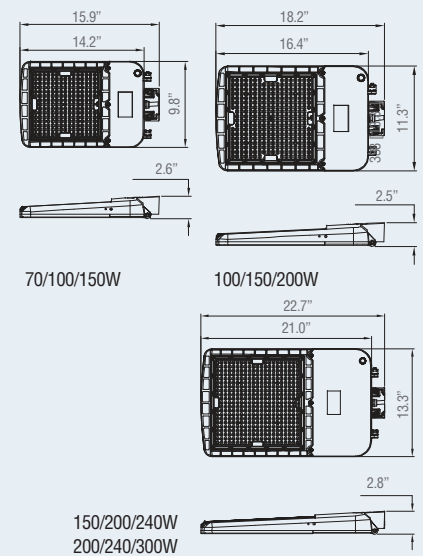

ORDER CODE	MODEL NUMBER	DLC ID	WATTS	LUMENS	CCT(K)	LIFE HRS	CRI	IP	MOL (IN)	CASE QTY.
L6420-0150	ILX-AP2150W-WSMV3CCT	S-Y4XC80	70/100/150W	19500	30/40/50K	50,000	80+	66	15.9x9.8x2.6	1
L6420-0200	ILX-AP2200W-WSMV3CCT	S-KFNQK3	100/150/200W	26000	30/40/50K	50,000	80+	66	18.8x11.3x2.5	1
L6420-0240	ILX-AP2240W-WSMV3CCT	S-WWQ80W	150/200/240W	31200	30/40/50K	50,000	80+	66	22.7x21x13.3	1

#### Mountings

L6420-10A1 Slip-fitter Mount, Type A, L6420-10B1 Fixed Arm Mount, Type C, L6420-10D1 Trunnion Mount, Type D, L6420-10H1 Universal Mount, Type H

ILLUMINEX TECHNOLOGIES INC.

Tel: 1-905-264-6670 Toll Free: 1-844-985-1590 Fax: 1-905-264-6671

Email: [csr@illuminexled.com](mailto:csr@illuminexled.com) | Website: [www.illuminexled.com](http://www.illuminexled.com)

Head Office: 1-1 Keyes Court, Vaughan, ON L4H 4V6