



### Tailor Your Light to Any Space!

Selectable Color Temperatures of 2700K/3000K/3500K/4000K/5000K



## Product information

### FEATURES

- 6" 12W 1300lm
- Selectable color temperatures of 27000K/3000K/3500K/4000K/5000K
- Fire rated 2H FT4 cable
- Suitable for wet locations
- Energy Star, cETLus listed
- Type IC rated (direct contact with insulation)
- Dimmable
- Less than 0.1% defective rate
- 50,000 hour life
- Acrylic PMMA light guide
- Air-tight aluminum housing
- Quick & easy installation
- No flicker, mercury free, instant on
- 5-year warranty

### APPLICATION

- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom


### INSTALLATION

- Recessed
- Insulated/drop ceilings
- Fits under studs and in narrow plenums

### ADDITIONAL INFO

- White Finish
- Operating Temperature -10°C ~+40°C

### DIAGRAM

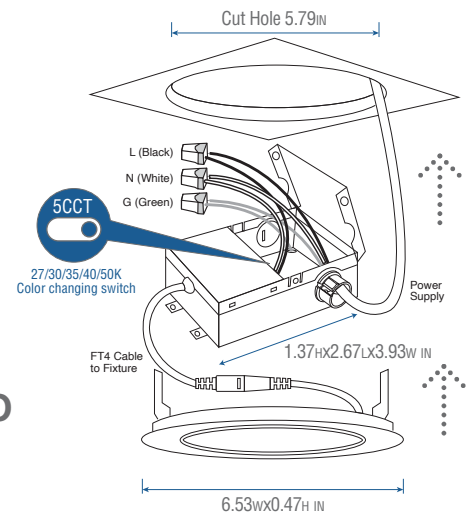

ORDER CODE	ENERGY STAR LISTING CODE	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	CRI	IP	PF	MOL (IN)	MOUNT SIZE (IN)	CASE QTY.
L3506-5300	ILX-SP-12W-5CCT-WL	SP PRO 6"R 12W 5CCT 1300LM FT4 CABLE WET LOCATION FLAT	12	120 V	1300	2700K 3000K 3500K 4000K 5000K	50,000	110°	82	54	0.94	6.53	5.79	40