



Slim Profile

Simply Brilliant



High CRI Dimmable



Product information

FEATURES

- 1x4, 2x2, 2x4FT 130LM/W Backlit Panel
- Watts Selectable to 30/35/40W & 30/40/50W
- Color Selectable to 3500K/4000K/5000K
- ETL listed, DLC 5.1 Premium
- Dimmable (0-10V)
- 50,000 hour life
- High CRI 80+
- Replaces 4 x F32T8 fixture
- Slim profile 1.17 inch housing
- Polycarbonate diffuser
- Aluminum housing AL6063-T6
- Suitable for damp locations (IP20)
- No flicker, mercury free, instant on
- 5-year warranty

APPLICATION

- Healthcare
- Offices
- Retail
- Museum
- Hospitality
- Commercial
- Lighting showroom


INSTALLATION

- Recessed
- Suspending

ADDITIONAL INFO

- White Trim
- Operating Temperature -20°C ~+45°C

DIAGRAM

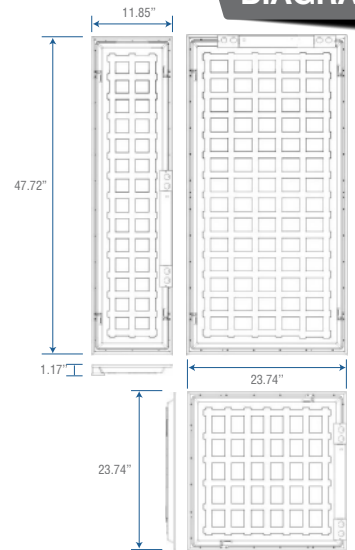

ITEM NO.	MODEL NO.	DLC ID	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	BEAM ANGLE	PF	MOL (IN)	CASE QTY.
L2733-3150-BX2	ILX-BLP314-40W-MV-T3CCTWS	S-Y3SJLC	BACKLIT 1X4 40WS 3CCT MV 130L	30	120-347V	3900	3500K	120°	0.9	47.72x11.85x1.17	2
				35		4550	4000K				
				40		5200	5000K				
L2733-3250-BX2	ILX-BLP322-40W-MV-T3CCTWS	S-KW0TR7	BACKLIT 2X2 40WS 3CCT MV 130L	30	120-347V	3900	3500K	120°	0.9	23.74x23.74x1.17	2
				35		4550	4000K				
				40		5200	5000K				
L2733-3350-BX2	ILX-BLP324-50W-MV-T3CCTWS	S-HP1GS4	BACKLIT 2X4 50WS 3CCT MV 130L	30	120-347V	3900	3500K	120°	0.9	47.72x23.74x1.17	2
				40		5200	4000K				
				50		6500	5000K				

MODEL EXAMPLE

ILX	BLP3	24	50W	MV	T3CCTWS
Brand	Product Type	Size	Wattage	Voltage	Feature
illuminex	Backlit Panel Series	1=1FT 2=2FT 4=4FT	40W 50W	MV=120-347V Multi-Volt	3CCT=35/40/50K WS=Watts Selectable

ILLUMINEX TECHNOLOGIES INC.

Tel: 1-905-264-6670 Toll Free: 1-844-985-1590 Fax: 1-905-264-6671

Email: csr@illuminexled.com | Website: www.illuminexled.com

Head Office: 1-1 Keyes Court, Vaughan, ON L4H 4V6